

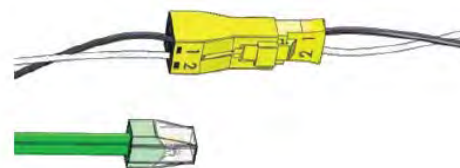


Electric Mirror Lighted Mirror products use a NEC Luminaire connector for connecting the wiring in the walls to the mirror chassis. Please see connection and use instructions below.

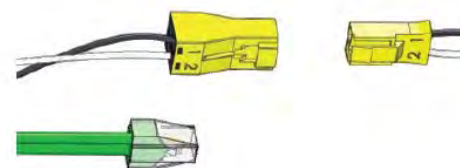

Turn power off to the location. Use 12-18 AWG solid wire for the following instructions:

1. Bring in the Line (black), Neutral (white), and grounding wire into the chassis knockout. Contact Electric Mirror for wiring knockout location information for your specific mirror model.
2. Strip wires (0.375") and Insert the power wiring into the Luminaire Disconnect (yellow in color) and the grounding connector (green in color). The connectors are a push wire style, you will not require any tooling to insert.
3. Once properly inserted, connect the Luminaire Disconnect together.

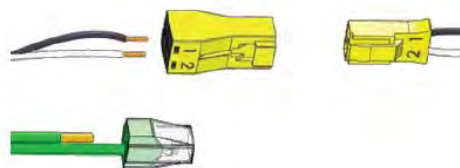

Disclaimer: If circuit wiring is stranded, remove luminaire disconnect and use an appropriately sized listed wire nut to make wiring connections.