

ASCENSION™ MIRRORED CABINET

Hospitality Performance Specification



The Ascension™ Mirrored Cabinet combines ultra-sleek modern design with ascending vertical lighting patterns that providing fully integrated consistent and even glow. The first mirrored cabinet with integrated LED lighting in an ultra-thin mirrored door.

THERE'S ONLY ONE ELECTRIC MIRROR™

Electric Mirror is the global leader in lighted mirrors and mirror TV technology. With unparalleled customer service and amazing innovation, Electric Mirror is the standard of luxury for five-star hotels, upscale commercial projects and designer homes.

FEATURES

- High power energy efficient LED lighting
- Defogger (10.5" x 10.5") with internal switch
- Exceptional mirror reflectivity
- Sleek double-sided 3/4" mirrored door
- Mirrored interior
- Matte silver aluminum cabinet body
- Adjustable Diamond Clear™ extra white glass shelves
- HardCoat™ anti-corrosion mirror treatment
- 170 degree door opening angle (soft close)
- Interior 20 Amp, 120 VAC GFCI receptacle with two electrical outlets
- Rust resistant anodized aluminum chassis construction
- Proudly made in the USA
- Patent pending

LIGHTING

- Natural light color - Ideal for makeup application
- Power buttons for lights and defogger inside cabinet
- 50,000 hour energy efficient LED lighting
- CRI 85
- CCT (K) 3000

OPTIONS

- Add TV (See Visionary™ Mirrored Cabinet)
- Left hinge (LT) or right hinge (RT)
- Recessed (RM) or surface mount (SM) includes mirror side kit
- 3/4" beveled edge
- 240 VAC version available
- Dimmable - Separate wall control required

SAFETY

- Tested to UL/U-C 962
- Mercury free environmentally sustainable lighting
- Designed for humid bathroom environments

SPECIFICATION


- The top of the mirrored cabinet above the bathroom vanity should be a minimum of 6' 6" above the finished floor.
- Electrical connections made with MC cable brought through the cabinet knockout, no electrical box required.
- Cabinet should be on a 20 amp unswitched circuit to accommodate a GFCI and cabinet should be controlled by a light switch.
- Fixture should be mounted to wall studs to provide sufficient support. Mounting holes are provided in the cabinet.
- For surface mounted versions, hanging hardware is provided.

ASCENSION™ MIRRORING CABINET

Hospitality Performance Specification

MODEL NUMBER	DIMENSIONS	POWER REQUIREMENTS
ASC-19.25x40.00*	19.25" W x 40" H x 4" D 489mm x 1016mm x 102mm	120 VAC, .5 amps, 65W, 20 amp GFCI
ASC-23.25x40.00*	23.25" W x 40" H x 4" D 591mm x 1016mm x 102mm	120 VAC, .5 amps, 65W, 20 amp GFCI

*When making order, please note the following preferences: Right Hinge (RH) or Left Hinge (LH), Recessed Mount (RM) or Surface Mount (SM).

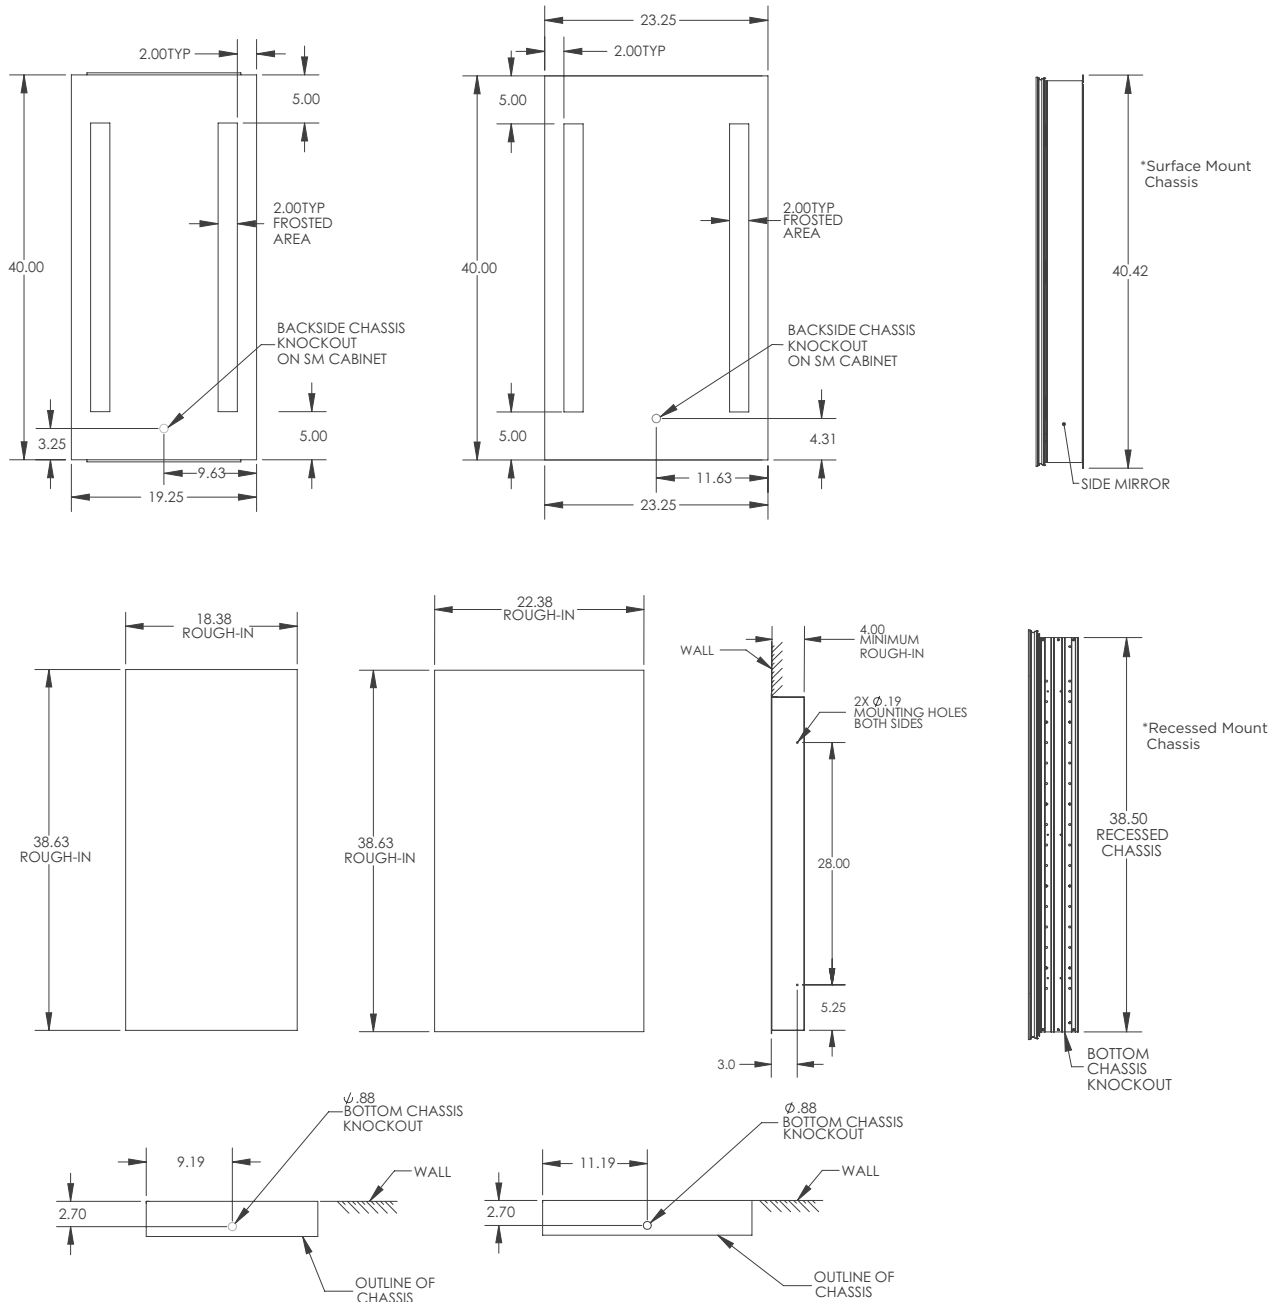

PROPRIETARY AND CONFIDENTIAL: The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.

© 2012 ELECTRIC MIRROR®