

# NORTHSTAR™

## 154 BATH/SPA TV

### WITH INTEGRATED SPEAKERS

Installation Instructions



# IMPORTANT SAFETY INSTRUCTIONS

---

Must be installed by a qualified electrician  
Read these instructions. Keep these instructions for future use.  
Install in accordance with manufacturer's instructions.

This product is suitable for wet locations. Clean only with water, mild soap and soft cloth. Do not clean with harsh detergents.

Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (Including amplifiers) that produce heat.

Do not defeat the safety purpose of the grounding-type plug.  
A grounding-type plug has two blades and a third grounding prong.  
The third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and where they exit from the appliance.

Only use attachments/accessories specified by the manufacturer.

Unplug this apparatus during lightning storms or when unused for long periods of time.

Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as: power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Terminals that are marked with a lightning flash are hazardous. Any external wiring connections to these terminals requires installation by an electrician.

## **CAUTION**

READ ALL INSTRUCTIONS PRIOR TO INSTALLATION

## **WARNING:**

TO PREVENT INJURY, THE BATH/SPA TV MUST BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS

**CAUTION:** NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED PERSONNEL. BEWARE OF STATIC SENSITIVE PARTS.

Model: NOR-154-MS

# CHOOSE BATH/SPA TV LOCATION

---

The Bath/Spa TV should be placed at a proper height to allow for the best viewing angle. Consideration should be given to the most common viewing position whether viewing from the tub or vanity area.

# UNPACKING YOUR BATH/SPA TV

## Verify Contents


Prior to installation unpack items and verify contents. The Bath/Spa TV comes with the following components:

1. In-Wall box with right angled plastic L-channel pieces
2. A NRTL Approved Power Supply, 15 Watts AC/DC, 90-264 Volts input and 12 Volts output
3. Power cord
4. HDMI cable
5. RF Cable
6. LCD-TV with glass face and stainless steel bezel
7. Remote Control

## PREPARE WALL OPENING

Please note that all electrical installations should be carried out by a fully qualified electrician in conformance with the National Electrical Code.

Cut a 17-1/2" W X 11-1/2" H X 3-1/2" deep recess in the wall board to accommodate the in-Wall Box. The recess in the wall should be open below the In-Wall Box to allow cables to enter the bottom of the unit. The wall should be of suitable strength to support the weight of the Bath/Spa TV (32.5 lbs). Vertically mounted 2" x 4" wall studs may be used to provide extra support to the wall board.

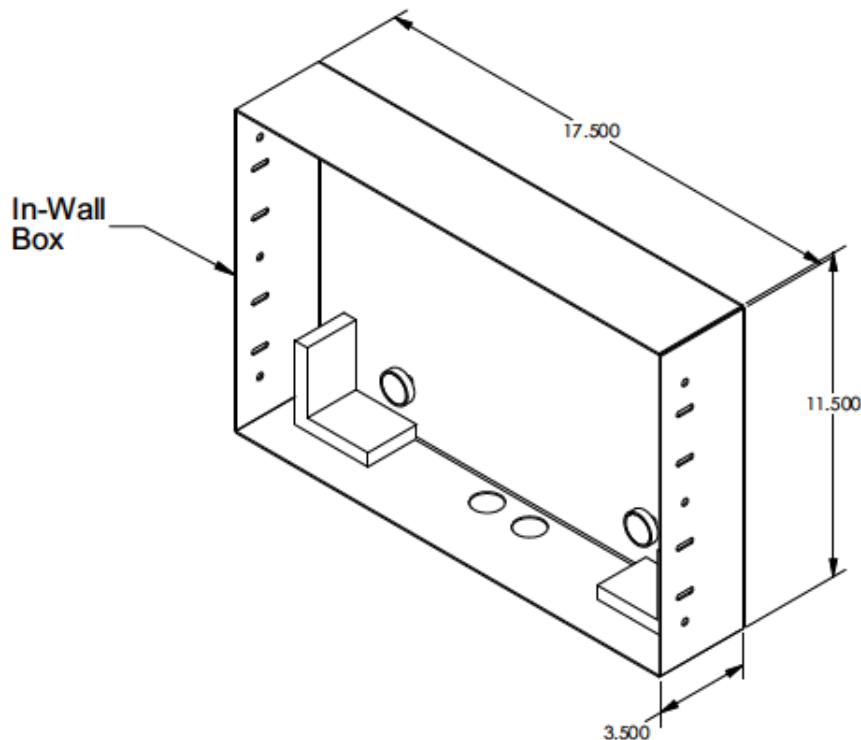

## CABLING AND ELECTRICAL INSTALLATION

Please note, all electrical installation should be carried out by a fully qualified electrician in conformance with the National Electrical Code.

### Electrical Outlets

The LCD-TV requires a GFCI receptacle in which to plug the 12-120V AC/DC adapter. Install a receptacle for this adapter. The receptacle should be located in a readily accessible area in a dry location.

FAILURE TO DO SO MAY RESULT IN DEATH OR SERIOUS INJURY

Plug the power supply cable of the AC/DC adapter into the outlet. The power adapter is not waterproof and therefore must be positioned in a dry, well-ventilated, accessible area away from water, moisture or heat source.

The 12V side of the AC/DC adapter powers the Northstar LCD-TV. The AC/DC adapter of the LCD-TV is fitted with a 25' low voltage cable that should be fed behind the wall to the LCD-TV. Make sure there are two (2) feet of extra slack at the LCD-TV to allow the power connector to be plugged into the TV for installation. The low voltage cable should not be cut, shortened or lengthened in any way. Doing so may cause damage to the unit and voids all warranty.

### Audio Connection

The Northstar LCD-TV has internal speakers. No outside audio connection is necessary.


### Video Connection

The Northstar LCD-TV has the following video input options:

- RF Connection
- Composite Connections
- S-Video Connection
- VGA Connection
- HDMI Connection

## INSTALLING THE MOUNTING BRACKET


Level and attach the In-Wall Box into the wall using the twelve (12) screws provided.

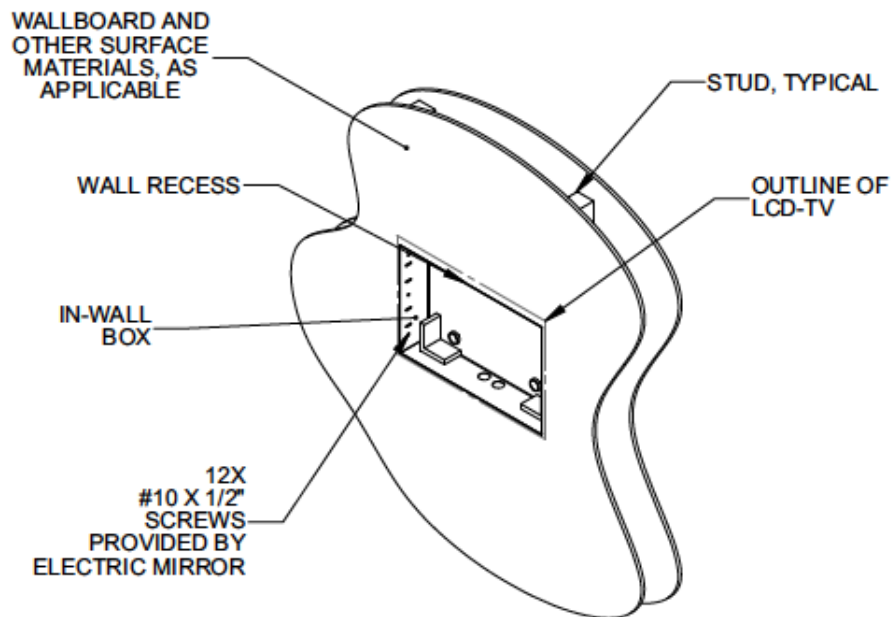

## INSTALLING THE LCD-TV

Remove the Northstar 154 LCD-TV from its packaging. The back of the TV has a cable outlet module with cables configured to the customer's requirements. In the proper orientation the cables exit downward out of the module. Make sure the appropriate cables and their connectors are present. These include a low-voltage power cord and audio/video source connectors.

Fit the Northstar 154 LCD-TV into the In-Wall Box by aligning the unit on the plastic L-Channel pieces. Push the TV towards the back of the In-Wall box until the magnetic force is apparent. Be careful with your hand placement to avoid having your fingers in between the stainless steel bezel and the wall when the magnetic force takes full effect.

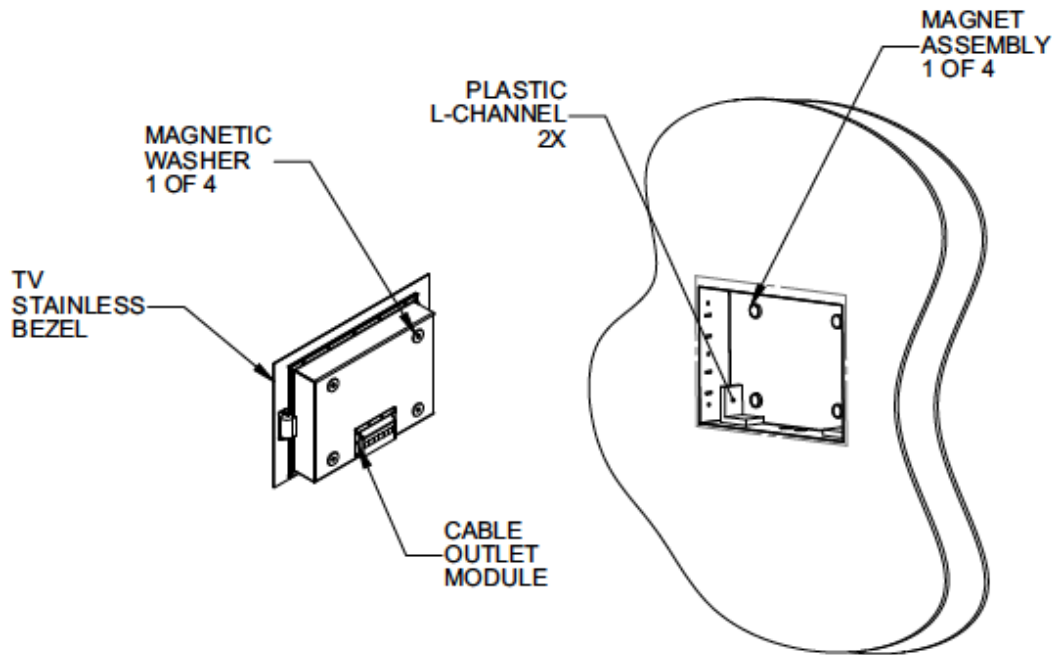


#### Test the LCD-TV

Prior to sealing the unit, turn on the LCD TV and make sure it is operating properly.

#### Seal the LCD-TV

When you are sure that the unit is installed and operating correctly, turn the TV off and apply a clear non-corrosive\* silicone sealant to the joint between the edges of the stainless steel bezel and the wall surface material. Ensure that the silicone is applied into the gap evenly and is applied without any gaps, bubbles, etc. Wipe away any excess silicone. This seal is of the greatest importance to the reliability and safe operation of the unit and must be water tight. The unit will require cleaning and resealing after any service or repair.

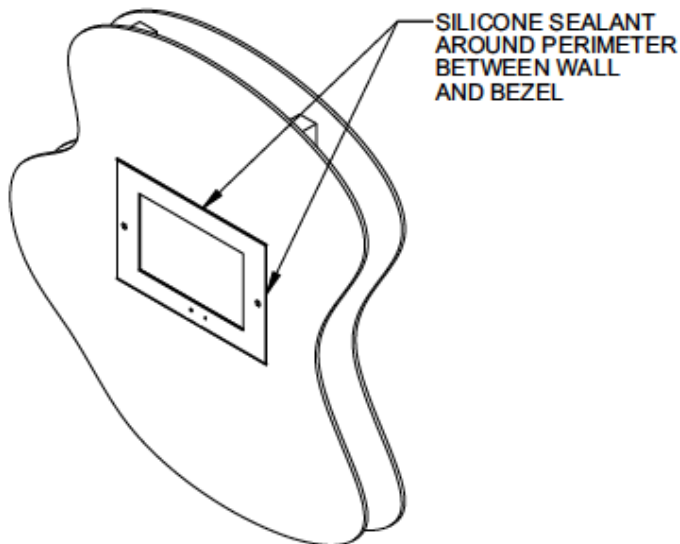

\*Recommended Silicone Sealants

Loctite: 51388 Superflex

Dow Corning: Any of their neutral-cure flow able silicone adhesives.