


## INTEGRITY™ LIGHTED MIRROR

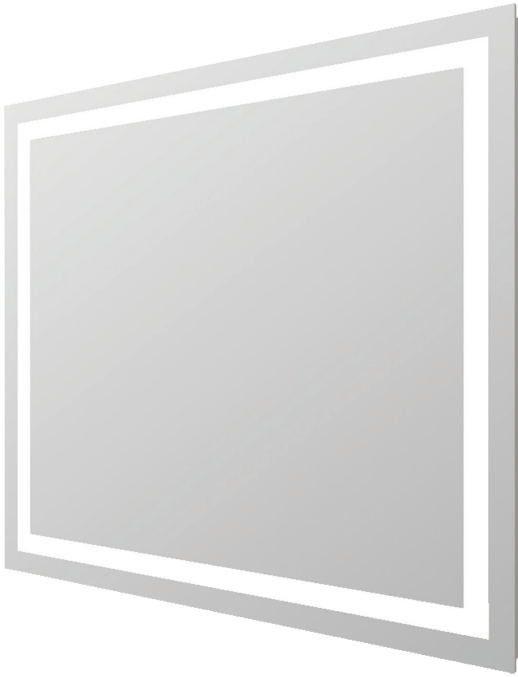

The Integrity™ Lighted Mirror adds light and grace to its surrounding space with a polished edge mirror and an inner frame of frosted light.

### FEATURES

- E-Life™-8 Years Extended Lamp Replacement Cycle
- Natural Light Color
- HardCoat™ Anti-Corrosion Mirror Treatment
- Environmentally Sustainable
- Energy Efficient
- Proudly Made in The USA
- Patented (US 7,853,414)

### LIGHTING

- Low-Mercury T5HO Warm Fluorescent (US Made)
- CRI 85
- CCT (K) 3000
- 50,000 Cycle Ballast

### OPTIONS:

- Custom Sizes Available
- Add a TV (See Integrity Lighted Mirror TV)
- Add Keen™ Technology
- Add Vive™ Technology
- Diamond Clear™
- Add Frame (See Momentum Lighted Mirror)
- Dimmable
- Defogger
- Night Light (See Momentum Lighted Mirror)
- Glass Shelf
- LED Digital Clock
- LED Lighting
- Wall Glow
- EnergyLite™

### SAFETY

- Tested to UL/UL-C 1598 Including Section 16.23
- International Certifications
- Safety Backed Mirror

### THERE'S ONLY ONE™ ELECTRIC MIRROR®

Electric Mirror is the global leader in Lighted Mirrors and Mirror TV technology. With unparalleled customer service and amazing innovation, Electric Mirror is the standard of luxury for five-star hotels, upscale commercial projects and designer homes.

**PROPRIETARY AND CONFIDENTIAL:** The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.


© 2015 ELECTRIC MIRROR®

**INTEGRITY™ LIGHTED MIRROR**

**SPECIFICATION**

- The top of the lighted mirror above the bathroom vanity should be a minimum of 6' 6" above the finished floor.
- Electrical connections made with MC cable brought through the chassis knockout, no electrical box required.
- Electrical power should be controlled by a light switch.
- Fixture should be mounted to wall studs to provide sufficient support. Mounting holes are provided in the chassis.

MODEL NUMBER	DIMENSIONS	POWER REQUIREMENTS	LAMPING
INT-18.00x44.00	18" W x 44" H x 3" D 457mm x 1,118mm x 76mm	120 - 277 VAC, 1.5 - .59 Amps, 165W	3 x T5 Circline, 55W
INT-21.00x36.00	21" W x 36" H x 3" D 533mm x 914mm x 76mm	120 - 277 VAC, 1.0 - .40 Amps, 110W	2 x T5 Circline, 55W
INT-36.00x42.00	36" W x 42" H x 3" D 914mm x 1,067mm x 76mm	120 - 277 VAC, 1.4 - .56 Amps, 156W	4 x T5HO, 39W
INT-42.00x36.00	42" W x 36" H x 3" D 1,067mm x 914mm x 76mm	120 - 277 VAC, 1.3 - .56 Amps, 156W	4 x T5HO, 39W
INT-42.00x42.00	42" W x 42" H x 3" D 1,067mm x 1,067mm x 76mm	120 - 277 VAC, 1.3 - .56 Amps, 156W	4 x T5HO, 39W
INT-54.00x36.00	54" W x 36" H x 3" D 1,372mm x 914mm x 76mm	120 - 277 VAC, 1.69 - .67 Amps, 186W	4 x T5HO, 54W/39W
INT-72.00x42.00	72" W x 42" H x 3" D 1,829mm x 1,067mm x 76mm	120 - 277 VAC, 1.95 - .84 Amps, 156W	6 x T5HO, 39W

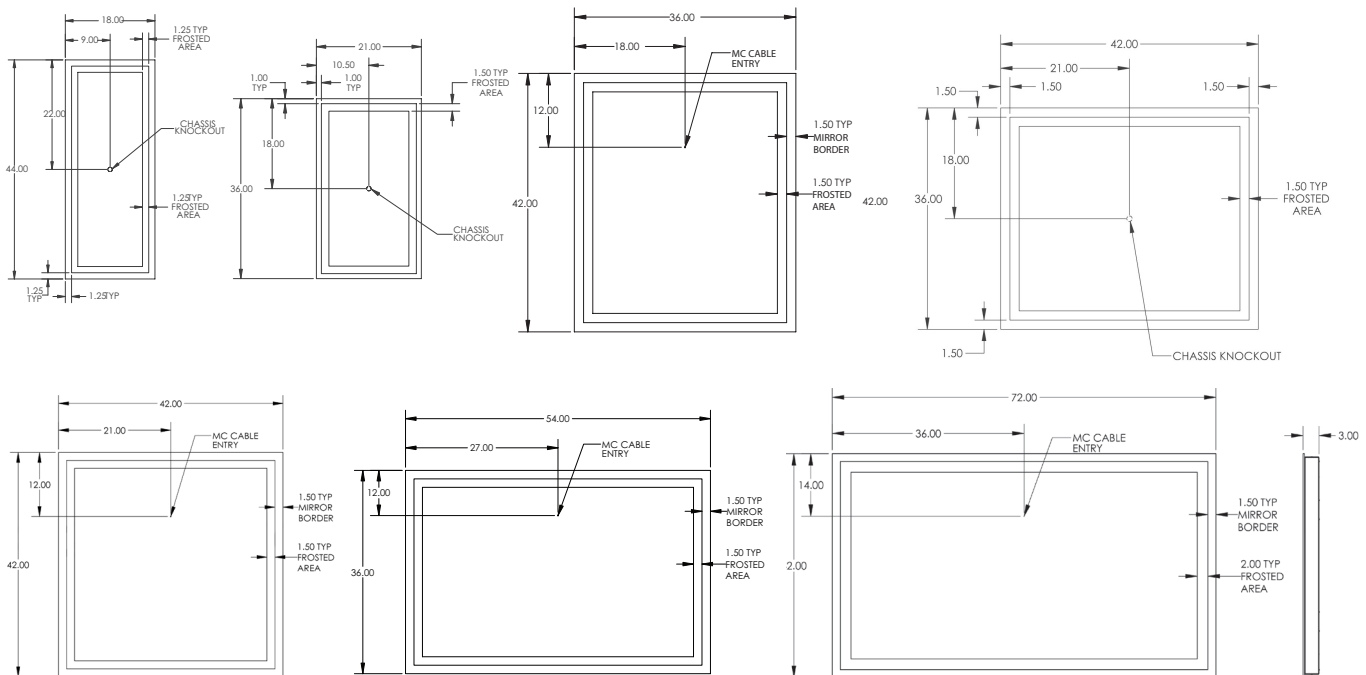

**PROPRIETARY AND CONFIDENTIAL:** The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.

© 2015 ELECTRIC MIRROR®

