



WALLWAVES SPEAKERS

Installation Instructions

INSTALLATION

To install the WallWaves speakers, first clean an area of the drywall to place the speakers within the top or bottom portion of the Wall Box cutout. The speakers work best when there are not obstructions between the wall area and listener (cabinets, countertops, etc.)

Peel the adhesive lines and stick in place. The adhesive is time sensitive, the longer the adhesive tape is applied the stronger the bond. Try to place the speakers only one time. *To remove, slide a putty knife and gently wedge the speakers out.

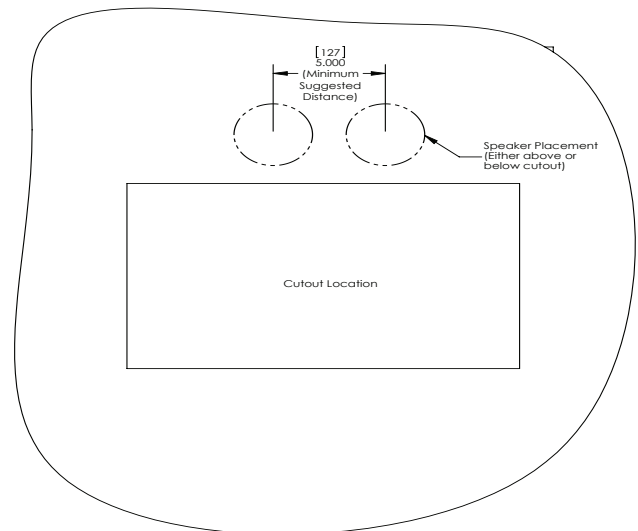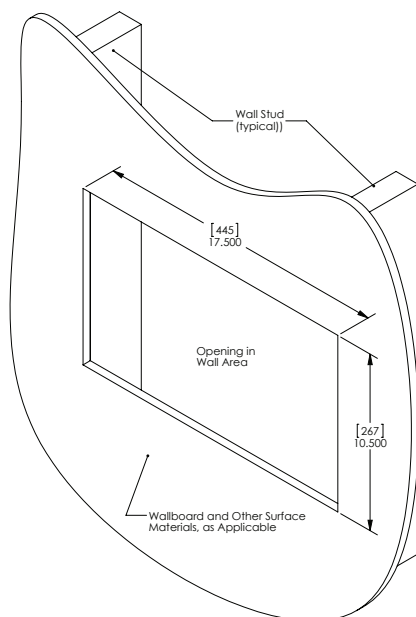

For placement of speakers, attempt a trial run while the adhesive cover is still applied (The adhesive on the speakers is for one use only). The speakers should be a minimum of 5" apart center to center to make sure the speakers are not touching each other.

TECHNICAL SUPPORT

For support, please use this contact information:

Electric Mirror, Inc.
11831 Beverly Park Road
Building D
Everett, WA 98204 USA
t: 425 776-4946
f: 425 491-8200

WARRANTY

WARRANTY INFORMATION

For warranty information:
visit www.electricmirror.com/warranty/



All Rights Reserved. All designs, engineering drawings, images, photographs, logos and written material that appear in this document are protected by copyright. The information contained in this document is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror is prohibited.