


Ascension™ Mirrored Cabinet

Product Specifications: Residential

ELECTRIC MIRROR®

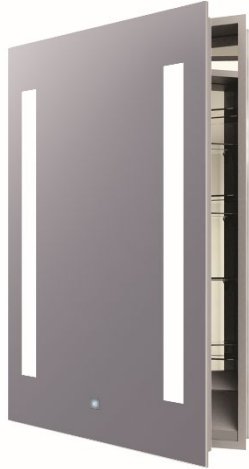

PRODUCT DESCRIPTION

Combining a streamlined design and ascending vertical lighting pattern with touch dimming technology, the Ascension™ Mirrored Cabinet brings incredible versatility and style to any bathroom.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirrored cabinet with forward-facing task lighting and corrosion-resistant glass. Mirror shall have dimmable light technology with built-in defogger for fog-free operation. Mirror will have LEDs with greater than or equal to 90 CRI (color rendering index). Product will have a 3-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ☑ Global mirror technology leader for over 20 years
- ☑ More installations than all competitors combined
- ☑ Realistic warranty you can believe in and trust
- ☑ Lowest total cost of ownership
- ☑ U.S. based customer service support
- ☑ 125,000 square foot American manufacturing facility

FEATURES AND BENEFITS

- Copper-free, corrosion-resistant DuraMirror™ glass
- Forward-facing task lighting in the mirror door
- Touch Dimming Technology¹
- Integrated defogger¹
- Fully mirrored interior with top light
- Adjustable glass shelves
- Matte silver aluminum cabinet body
- Interior 20 Amp, 120VAC GFCI receptacle with two electrical outlets and 4 USB Ports
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Surface mounting kit included
- ADA compliant
- 3-year limited warranty
- Covered by one or more patents

AVAILABLE OPTIONS

- Ganging Kit for installation of side-by-side mirrored cabinets

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 604 lumens per foot
- Calculated L₇₀ 124,000-hour LED lifespan
- Maximum 100 lumens per watt efficacy

SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- Safety-backed mirror

¹ See technology specification sheets for more information.

INSTALLATION SPECIFICATIONS

- 120V hardwire electrical connection; provide 12" whip; junction box not required; interior 20 Amp, GFCI outlet should be on a 120V, 20 Amp unswitched circuit; refer to installation instructions for further details and options
- Cabinet can be recess-mounted to wall studs; mounting holes are provided
- Fixture may be controlled by an on/off switch or by using Keen touch control, located 3" from bottom of the mirror

MODELS

Base Model with Left Hinge*	Base Model with Right Hinge*	Dimensions	Rough-in Dimensions	Power Requirements**
ASC-2330-TD-LT	ASC-2330-TD-RT	23.25"W x 30.00"H x 4.80"D (590mm x 864mm x 125mm)	22.63"W x 29.45"H (575mm x 748mm)	120/240 VAC, 63W
ASC-2336-TD-LT	ASC-2336-TD-RT	23.25"W x 36.00"H x 4.80"D (590mm x 914mm x 125mm)	22.63"W x 35.43"H (575mm x 900mm)	120/240 VAC, 69W
ASC-2340-TD-LT	ASC-2340-TD-RT	23.25"W x 40.00"H x 4.80"D (590mm x 1016mm x 125mm)	22.63"W x 39.45"H (575mm x 1002mm)	120/240 VAC, 74W

*Base, recess-mounted model number shown only. To specify additional options, contact Electric Mirror at residential@electricmirror.com

** Power requirements include defogger power.

DIMENSIONAL DRAWING (Not to scale. Total cabinet depth is 4.80". The recessed depth is 3.80". Recommend minimum 4" wall depth space. Depth after recessed installation is 1.00" D).

