


# Ascension™ Mirrored Cabinet

Product Specifications: Residential

**ELECTRIC MIRROR®**

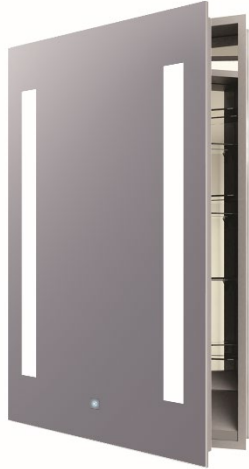

## PRODUCT DESCRIPTION

Combining a streamlined design and ascending vertical lighting pattern with touch dimming technology, the Ascension™ Mirrored Cabinet brings incredible versatility and style to any bathroom.

## SPECIFICATION STATEMENT

Solution shall consist of a lighted mirrored cabinet with forward-facing task lighting and corrosion-resistant glass. Mirror shall have dimmable light technology with built-in defogger for fog-free operation. Mirror will have LEDs with greater than or equal to 90 CRI (color rendering index). Product will have a 3-year limited warranty.

## THE ELECTRIC MIRROR ADVANTAGE

- ☑ Global mirror technology leader for over 20 years
- ☑ More installations than all competitors combined
- ☑ Realistic warranty you can believe in and trust
- ☑ Lowest total cost of ownership
- ☑ U.S. based customer service support
- ☑ 125,000 square foot American manufacturing facility

## FEATURES AND BENEFITS

- Copper-free, corrosion-resistant DuraMirror™ glass
- Forward-facing task lighting in the mirror door
- Touch Dimming Technology<sup>1</sup>
- Integrated defogger<sup>1</sup>
- Fully mirrored interior with top light
- Adjustable glass shelves
- Matte silver aluminum cabinet body
- Interior 20 Amp, 120VAC GFCI receptacle
- Two electrical outlets and four USB Ports
- Suitable for damp bathroom environments
- Environmentally sustainable
- Energy efficient
- Easy installation
- Surface mounting kit included
- ADA compliant
- 3-year limited warranty
- Covered by one or more patents

## AVAILABLE OPTIONS

- Ganging Kit for installation of side-by-side mirrored cabinets

## LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- CRI: 90+
- CCT: 3,000 Kelvin
- 604 lumens per foot
- Calculated L<sub>70</sub> 52,000-hour LED lifespan
- Maximum 100 lumens per watt efficacy

## SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards

<sup>1</sup> See technology specification sheets for more information.

## INSTALLATION SPECIFICATIONS

- 120V hardwire electrical connection; provide 12" whip; junction box not required; interior 20 Amp, GFCI outlet should be on a 120V, 20 Amp unswitched circuit; refer to installation instructions for further details and options
- Cabinet can be recess-mounted to wall studs; mounting holes are provided
- Fixture may be controlled by an on/off switch or by using Keen touch control, located 3" from bottom of the mirror

## MODELS

Base Model with Left Hinge*	Base Model with Right Hinge*	Dimensions	Rough-in Dimensions	Power Requirements**
ASC-2330-TD-LT	ASC-2330-TD-RT	23.25"W x 30.00"H x 4.80"D (590mm x 864mm x 125mm)	22.63"W x 29.45"H (575mm x 748mm)	120/240 VAC, 63W
ASC-2336-TD-LT	ASC-2336-TD-RT	23.25"W x 36.00"H x 4.80"D (590mm x 914mm x 125mm)	22.63"W x 35.43"H (575mm x 900mm)	120/240 VAC, 69W
ASC-2340-TD-LT	ASC-2340-TD-RT	23.25"W x 40.00"H x 4.80"D (590mm x 1016mm x 125mm)	22.63"W x 39.45"H (575mm x 1002mm)	120/240 VAC, 74W

\*Base, recess-mounted model number shown only. To specify additional options, contact Electric Mirror at residential@electricmirror.com

\*\* Power requirements include defogger power.

**DIMENSIONAL DRAWING** (Not to scale. Total cabinet depth is 4.80". The recessed depth is 3.80". Recommend minimum 4" wall depth space. Depth after recessed installation is 1.00" D).

