



## MARQUISE™

### PRODUCT DESCRIPTION

With its bold, sculptural shape and refined vertical lighting accents, this mirror brings a dramatic sense of style to any bath space. The elegant curved edges create a custom, designer look, while the soft illuminated details add both function and ambiance. Striking yet sophisticated, this mirror is designed to stand out as a true focal point in classical interiors.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using high-density (44 LEDs/foot) replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 10-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming

### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- ADA compliant
- JA8-2022 compliant
- 10-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS

- Title 24 compliance <sup>1</sup>
- [Ava™ touch-tunable white + dimming technology](#) <sup>2,3</sup>
- [Keen™ one-touch energy-saving dimming technology](#) <sup>2,3</sup>
- [Polaris™ wire-free motion sensor nightlight technology](#) <sup>2,3</sup>
- [Seamless™ LED clock technology](#) <sup>2,3</sup>
- [Vive™ streaming audio technology](#) <sup>2,3</sup>
- Defogger
- CCT: 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- 0-10V, phase/triac, or Dali dimming
- 120VAC, 220–240VAC, or 277VAC power <sup>4</sup>
- Custom sizes <sup>2</sup>

### DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs


<sup>1</sup> Title 24 compliance requires 0-10V or forward-phase/triac dimming.

<sup>2</sup> Minimum order quantity required.

<sup>3</sup> See technology specification sheets for more details.

<sup>4</sup> May not be compatible with all upgrades and options.

**DIMENSIONAL DRAWING** (Not to scale.)

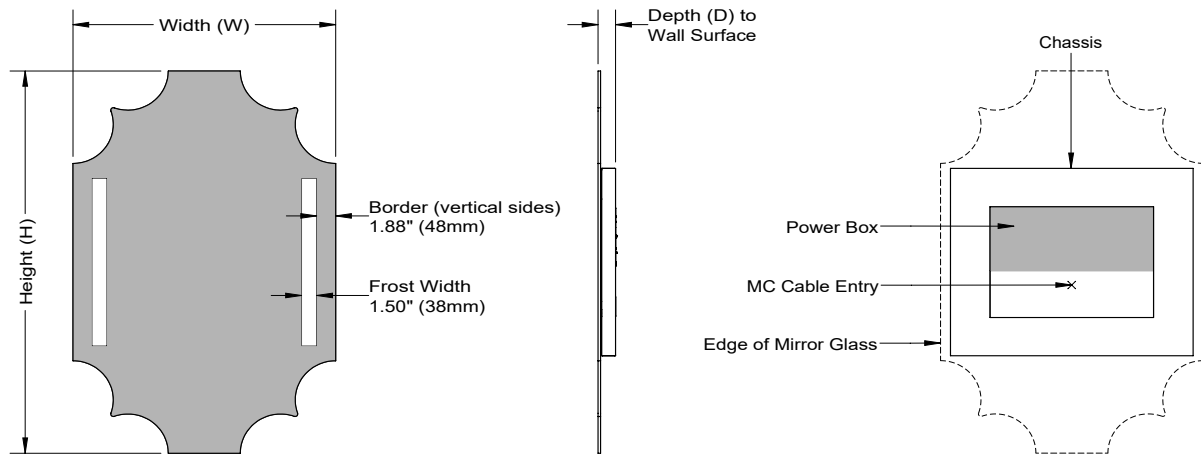

**STANDARD MODELS**

Model Numbers <sup>1,4</sup>	Dimensions <sup>2,4</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
MAR2.3-26.00x39.00-LSE-30K	26" W x 39" H x 1.75" D (660mm W x 991mm H x 44mm D)	3,698	120-240VAC, 30W
MAR2.3-30.00x50.00-LSE-30K	30" W x 50" H x 1.75" D (762mm W x 1,270mm H x 44mm D)	5,121	120-240VAC, 41W

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120-240VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.

<sup>4</sup> Specifications and dimensions are subject to change without notice. Electric Mirror reserves the right to change the part number specified based on the latest standards.