

VERITY™ VANITY MIRROR
COMMERCIAL PRODUCT SPECIFIER



S F T L V C
VER2.3 - [] - [] - [] - [] - [] - []
MODEL CODE SIZE FINISH TECHNOLOGY OPTIONS LED TYPE VOLTAGE COLOR TEMP

ADDITIONAL NOTES ¹

S MIRROR SIZE

In box S, enter the code for the size of the mirror.

Size (WxH)	Code
Standard Mirror Sizes	
24" x 36"	24.00X36.00
30" x 42"	30.00X42.00
36" x 36"	36.00X36.00
42" x 42"	42.00X42.00
48" x 36"	48.00X36.00
54" x 42"	54.00X42.00
60" x 36"	60.00X36.00
66" x 42"	66.00X42.00
72" x 42"	72.00X42.00
Custom ²	WW.WWXHH.HH

F FRAME FINISH

In box F, enter the code for the metal frame finish.

Finish	Code
Standard Finish Options	
Matte Black (BK-05)	BK05
Brushed Brass (BR-02)	BR02
Oil Rubbed Bronze (BZ-47)	BZ47
Etched Chrome (CH-04)	CH04
Other Finishes Available ²	

T TECHNOLOGY OPTIONS

In box T, enter the codes for each option with a hyphen between each one.

Technology Options	Code
Wiring (Hardwire Standard—No Code Needed)	
▪ 135° Offset Grounded Cord+Right-Angle Plug ⁵	CC2
Seamless™ LED Clock Technology ^{2,3}	
▪ Hardwired Clock, Switched with Lights	CK2
Dimming Technology ⁴	
▪ 0-10V Dimming (120-277VAC)	D1
▪ Phase/Triac Dimming (120-277VAC)	D2
▪ Dali Dimming (120-277VAC)	D4
Defogger	
▪ Standard Defogger Pad	DF
Keen™ One-Touch Energy-Saving Technology ^{2,3,4}	
▪ 1-Touch, 5-Step Dimming, Off	KC
Ava™ Touch-Tunable White on Mirror ^{2,3,4}	
▪ 1-Touch, 5 CCT Modes + Dimming	AH
▪ 1-Touch, 5 CCT Modes + Dim-to-Off + Memory	AK

Indicates Standard Configuration

¹ Use the additional notes field to specify options not listed.

² Minimum order quantity required.

³ See technology specification sheets for more details.

⁴ Keen™ is not compatible with other dimming options.

⁵ May not be compatible with all upgrades and options.

L LED TYPE

In box L, enter the code for the LED type.

LED Type	Code
Standard Output (853 lumens/ft; 6.72 watts/ft)	LSE
High Output ⁵ (1,280 lumens/ft; 9.72 watts/ft)	LHE

V VOLTAGE

In box V, enter the code for the voltage (code N/A for 120VAC).

Voltage	Code
120VAC (Standard—Leave Code Blank)	
220—240VAC	230V
277VAC ⁵	277V

C COLOR TEMPERATURE

In box C, enter the code for the correlated color temperature.

CCT (90+ CRI)	Code
2,700K (90+ CRI)	27K
3,000K (90+ CRI)	30K
3,500K (90+ CRI)	35K
4,000K (90+ CRI)	40K
5,000K (90+ CRI)	50K





VERITY™

PRODUCT DESCRIPTION

Verity™ exudes refined elegance, combining radiant illumination with a beautifully crafted frame that completes its sophisticated design. Smooth, crisp edges and a luminous inner band of frosted light create a soft, inviting glow, while the surrounding frame adds depth, structure, and a touch of timeless style. Both striking and practical, Verity™ enhances any space with its graceful presence and effortless functionality.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 10-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming


GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Energy efficient
- Fast lead times
- Easy installation
- JA8-2022 compliant
- 10-year limited warranty
- Patent: www.electricmirror.com/patents
- Made in America with U.S. and global components

AVAILABLE OPTIONS

- Title 24 Compliance ¹
- [Ava™ touch-tunable white + dimming technology](#)^{2,3}
- [Keen one-touch energy-saving dimming technology](#)^{2,3}
- [Polaris™ wire-free motion sensor nightlight technology](#)^{2,3}
- [Seamless LED clock technology](#)^{2,3}
- [Vive™ streaming audio technology](#)^{2,3}
- Defogger ²
- CCT: 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- 0-10V, phase/triac, or Dali dimming ^{2,4}
- 120VAC, 220-240VAC, or 277VAC ⁴ power
- Custom sizes ²

FINISHES



DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- Maximum efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs


¹ Title 24 compliance requires 0-10V or phase/triac dimming

² Minimum order quantity required

³ See technology specification sheets for more details

⁴ May not be compatible with all upgrades and options

DIMENSIONAL DRAWING (Not to scale.)

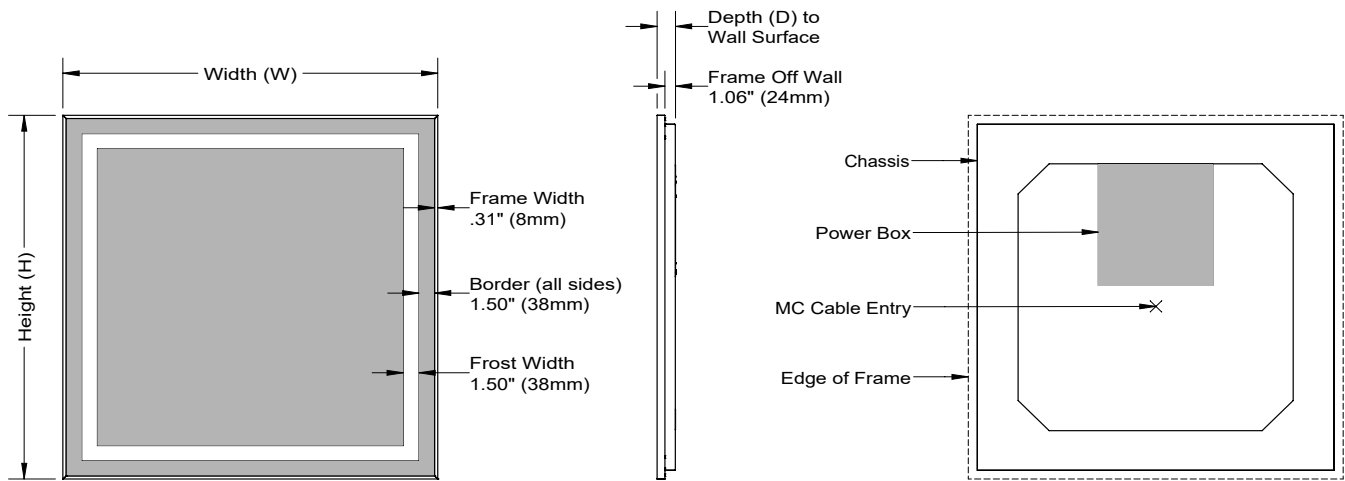

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120-240VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are $\pm 1/8"$ ($\pm 3\text{mm}$).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.

⁴ Specifications and dimensions are subject to change without notice. Electric Mirror reserves the right to change the part number specified based on the latest standards.

STANDARD MODELS

Model Number ^{1,4}	Finish	Dimensions ²	Initial Lumens/ Fixture ³	LED Power Requirements ³
VER2.3-EBBK05-24.00X36.00-LSE-30K	Matte Black (BK-05)	24" W x 36" H x 1.75" D (610mm W x 914mm H x 44mm D)	7,965	120-240VAC, 63W
VER2.3-EBBR02-24.00X36.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-24.00X36.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-24.00X36.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-30.00X42.00-LSE-30K	Matte Black (BK-05)	30" W x 42" H x 1.75" D (762mm W x 1,067mm H x 44mm D)	<u>9,799</u>	120-240VAC, 77W
VER2.3-EBBR02-30.00X42.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-30.00X42.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-30.00X42.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-36.00X36.00-LSE-30K	Matte Black (BK-05)	36" W x 36" H x 1.75" D (914mm W x 914mm H x 44mm D)	9,672	120-240VAC, 77W
VER2.3-EBBR02-36.00X36.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-36.00X36.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-36.00X36.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-42.00X42.00-LSE-30K	Matte Black (BK-05)	42" W x 42" H x 1.75" D (1,067mm W x 1,067mm H x 44mm D)	<u>11,510</u>	120-240VAC, 91W
VER2.3-EBBR02-42.00X42.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-42.00X42.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-42.00X42.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-48.00X36.00-LSE-30K	Matte Black (BK-05)	48" W x 36" H x 1.75" D (1,219mm W x 914mm H x 44mm D)	11,510	120-240VAC, 91W
VER2.3-EBBR02-48.00X36.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-48.00X36.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-48.00X36.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-54.00X42.00-LSE-30K	Matte Black (BK-05)	54" W x 42" H x 1.75" D (1,372mm W x 1,067mm H x 44mm D)	<u>13,221</u>	120-240VAC, 104W
VER2.3-EBBR02-54.00X42.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-54.00X42.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-54.00X42.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-60.00X36.00-LSE-30K	Matte Black (BK-05)	60" W x 36" H x 1.75" D (1,524mm W x 914mm H x 44mm D)	13,221	120-240VAC, 104W
VER2.3-EBBR02-60.00X36.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-60.00X36.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-60.00X36.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-66.00X42.00-LSE-30K	Matte Black (BK-05)	66" W x 42" H x 1.75" D (1,677mm W x 1,067mm H x 44mm D)	<u>14,932</u>	120-240VAC, 118W
VER2.3-EBBR02-66.00X42.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-66.00X42.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-66.00X42.00-LSE-30K	Etched Chrome (CH-04)			
VER2.3-EBBK05-72.00X42.00-LSE-30K	Matte Black (BK-05)	72" W x 42" H x 1.75" D (1,829mm W x 1,067mm H x 44mm D)	<u>15,865</u>	120-240VAC, 125W
VER2.3-EBBR02-72.00X42.00-LSE-30K	Brushed Brass (BR-02)			
VER2.3-EBBZ47-72.00X42.00-LSE-30K	Oil Rubbed Bronze (BZ-47)			
VER2.3-EBCH04-72.00X42.00-LSE-30K	Etched Chrome (CH-04)			