



VERITY™

PRODUCT DESCRIPTION

Verity™ exudes refined elegance, combining radiant illumination with a beautifully crafted frame that completes its sophisticated design. Smooth, crisp edges and a luminous inner band of frosted light create a soft, inviting glow, while the surrounding frame adds depth, structure, and a touch of timeless style. Both striking and practical, Verity™ enhances any space with its graceful presence and effortless functionality.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 10-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming


GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Energy efficient
- Fast lead times
- Easy installation
- JA8-2022 compliant
- 10-year limited warranty
- Patent: www.electricmirror.com/patents
- Made in America with U.S. and global components

AVAILABLE OPTIONS

- Title 24 Compliance ¹
- Ava™ touch-tunable white + dimming technology^{2, 3}
- Keen one-touch energy-saving dimming technology^{2, 3}
- Polaris™ wire-free motion sensor nightlight technology^{2, 3}
- Seamless LED clock technology^{2, 3}
- Vive™ streaming audio technology^{2, 3}
- Defogger ²
- CCT: 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- 0-10V, phase/triac, or Dali dimming ^{2, 4}
- 120VAC, 220-240VAC, or 277VAC ⁴ power
- Custom sizes ²

FINISHES



DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- Maximum efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs


¹ Title 24 compliance requires 0-10V or phase/triac dimming

² Minimum order quantity required

³ See technology specification sheets for more details

⁴ May not be compatible with all upgrades and options

DIMENSIONAL DRAWING (Not to scale.)

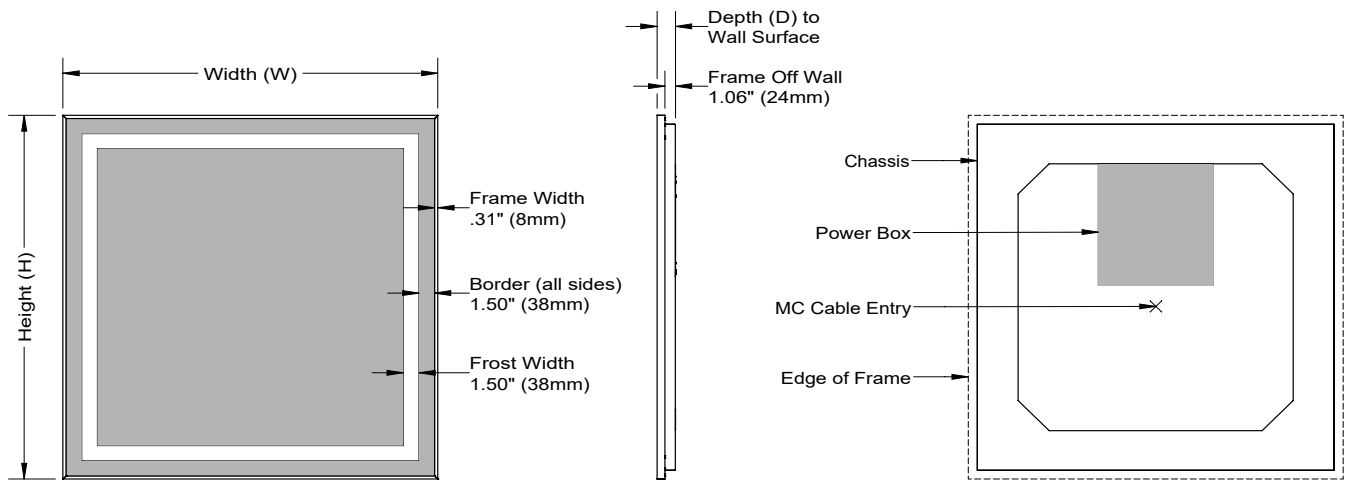

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120-240VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are $\pm 1/8"$ ($\pm 3\text{mm}$).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.

⁴ Specifications and dimensions are subject to change without notice. Electric Mirror reserves the right to change the part number specified based on the latest standards.

STANDARD MODELS

| Model Number ^{1,4} | Finish | Dimensions ² | Initial Lumens/ Fixture ³ | LED Power Requirements ³ |
|-----------------------------------|---------------------------|---|---|--|
| VER2.3-EBBK05-24.00X36.00-LSE-30K | Matte Black (BK-05) | 24" W x 36" H x 1.75" D (610mm W x 914mm H x 44mm D) | 7,965 | 120-240VAC, 63W |
| VER2.3-EBBR02-24.00X36.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-24.00X36.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-24.00X36.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-30.00X42.00-LSE-30K | Matte Black (BK-05) | 30" W x 42" H x 1.75" D (762mm W x 1,067mm H x 44mm D) | 9,799 | 120-240VAC, 77W |
| VER2.3-EBBR02-30.00X42.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-30.00X42.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-30.00X42.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-36.00X36.00-LSE-30K | Matte Black (BK-05) | 36" W x 36" H x 1.75" D (914mm W x 914mm H x 44mm D) | 9,672 | 120-240VAC, 77W |
| VER2.3-EBBR02-36.00X36.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-36.00X36.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-36.00X36.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-42.00X42.00-LSE-30K | Matte Black (BK-05) | 42" W x 42" H x 1.75" D (1,067mm W x 1,067mm H x 44mm D) | 11,510 | 120-240VAC, 91W |
| VER2.3-EBBR02-42.00X42.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-42.00X42.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-42.00X42.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-48.00X36.00-LSE-30K | Matte Black (BK-05) | 48" W x 36" H x 1.75" D (1,219mm W x 914mm H x 44mm D) | 11,510 | 120-240VAC, 91W |
| VER2.3-EBBR02-48.00X36.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-48.00X36.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-48.00X36.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-54.00X42.00-LSE-30K | Matte Black (BK-05) | 54" W x 42" H x 1.75" D (1,372mm W x 1,067mm H x 44mm D) | 13,221 | 120-240VAC, 104W |
| VER2.3-EBBR02-54.00X42.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-54.00X42.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-54.00X42.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-60.00X36.00-LSE-30K | Matte Black (BK-05) | 60" W x 36" H x 1.75" D (1,524mm W x 914mm H x 44mm D) | 13,221 | 120-240VAC, 104W |
| VER2.3-EBBR02-60.00X36.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-60.00X36.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-60.00X36.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-66.00X42.00-LSE-30K | Matte Black (BK-05) | 66" W x 42" H x 1.75" D (1,677mm W x 1,067mm H x 44mm D) | 14,932 | 120-240VAC, 118W |
| VER2.3-EBBR02-66.00X42.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-66.00X42.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-66.00X42.00-LSE-30K | Etched Chrome (CH-04) | | | |
| VER2.3-EBBK05-72.00X42.00-LSE-30K | Matte Black (BK-05) | 72" W x 42" H x 1.75" D (1,829mm W x 1,067mm H x 44mm D) | 15,865 | 120-240VAC, 125W |
| VER2.3-EBBR02-72.00X42.00-LSE-30K | Brushed Brass (BR-02) | | | |
| VER2.3-EBBZ47-72.00X42.00-LSE-30K | Oil Rubbed Bronze (BZ-47) | | | |
| VER2.3-EBCH04-72.00X42.00-LSE-30K | Etched Chrome (CH-04) | | | |