



EMINENCE™

PRODUCT DESCRIPTION

The Eminence™ frame-lit wardrobe mirror has risen to prominence among designers, adding prestige and distinction to every room it graces. Its unique shadow-box frame, inward-facing task lighting, and ambient wall-glow combine to create the perfect balance of form and function.

SPECIFICATION STATEMENT

Solution shall consist of a lighted wardrobe-length mirror with integrated one-touch dimming. LEDs will be mounted in a 90-degree channel in the frame of the mirror, with inward-facing directional lighting on the front face of the mirror and ambient glow behind the mirror. LEDs shall have an L70 life of >54,000 hours, with a greater than or equal to 90 CRI (color rendering index) and will be covered by an integrated diffuser. Product shall incorporate a driver enclosure that is to be mounted to the back of the mirror. Product will have a 10-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- One-touch dimmable inward-facing task lighting for brilliant facial illumination—ideal for makeup application and grooming
- One-touch dimmable perimeter wall-glow ambient lighting with diffuser for a finished side view
- Greater illuminance with half the power consumption of traditional LED mirrors


GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Sleek and modern profile
- Suitable for damp bathroom environments
- Energy efficient
- Fast lead times
- Easy installation
- ADA compliant
- 10-year limited warranty
- Patent: www.electricmirror.com/patents
- Made in America with U.S. and global components

AVAILABLE OPTIONS

- Clock technology
- Defogger ²
- 0-10V dimming ^{2,4}
- 220VAC power
- Custom sizes ²
- Cord connect

FINISHES



- Other finishes available ²

DEFAULT LIGHTING SPECIFICATIONS


- Natural-looking LED light color
- Front-of-glass illumination: 348 initial lumens/foot
- Wall-glow illumination: 720 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 98 lumens/watt
- Color temperature (CCT): 3,000K
- LED L70 lifespan (reported): >54,000-hours
- Built-in EMX™ diffusers

² Minimum order quantity required

³ See technology specification sheets for more details

⁴ May not be compatible with all upgrades and options

DIMENSIONAL DRAWING (Not to scale.)

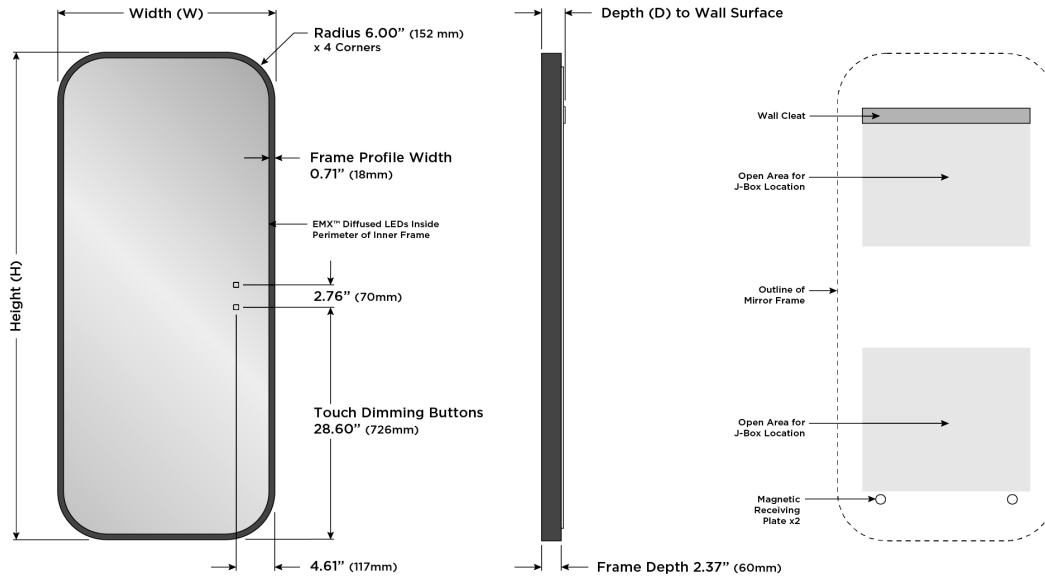

STANDARD MODELS

Model Number ¹	Finish	Dimensions ²	Initial Lumens/ Fixture ³	LED Power Requirements ³
EMN3.1-26.00X60.00-BK05-OS2-RC6.0-TD2-WG3-30K	Matte Black (BK-05)	26" W x 60" H x 2.17" D		
EMN3.1-26.00X60.00-BR02-OS2-RC6.0-TD2-WG3-30K	Brushed Brass (BR-02)	(660mm W x 1,524mm H x 55mm D)	13,638	120VAC, 124W
EMN3.1-26.00X60.00-CH04-OS2-RC6.0-TD2-WG3-30K	Etched Chrome (CH-04)			

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; whip provided with mirror; junction box controlled by a wall switch (by others) is required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by non-dimming wall switch (by others) for on/off, and capacitive touch button on fixture for dimming
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.